




cerasonar 6062 sub

The cerasonar 6062 sub can be easily installed in ceiling and walls, and is conceived to provide an extra bass kick for every invisible multiroom music projects. To be screwed directly on the studs, through the predrilled holes in every side, replacing the standard.



CAD details

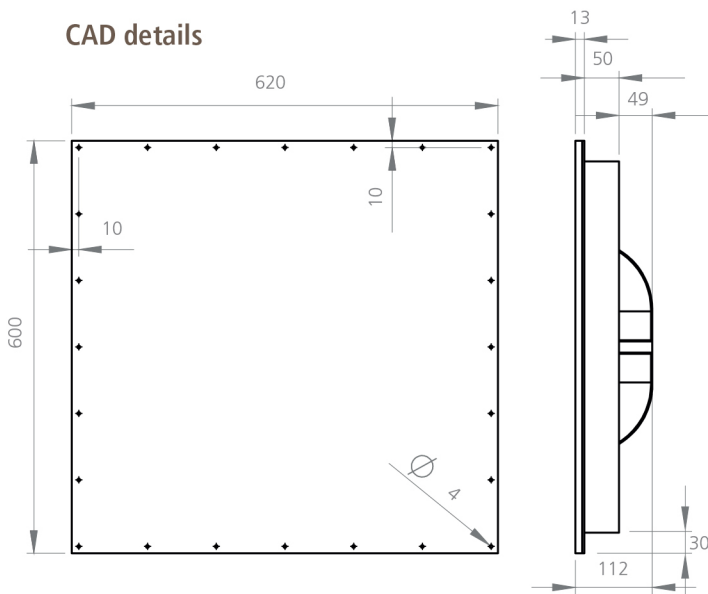

Technical specification

Power rating rms (max)	120 w
Impedance	4 ohms
Frequency range	35 – 150 hz
Dispersion range	hemispherical
max SPL	107 db
Dimensions	60 x 62 x 11,2 cm
Installation cut out	50 x 52 cm
Drywall	1- or 2-layer 12,5 mm plasterboard
Features	5 kg
Weight	2,1 kg

Installation Video:

Scan the QR code with your telephone to show the cerasonar installation video.



Warranty period

Cerasonar grants a 5-year functional warranty on speakers if the installation and setup protocol has been signed and registered with us. A cerasonar protection unit or the cs-500dsp4 amp with the respective preset is mandatory. Improper use or overloading may void the warranty.






cerasonar 13362 sub

The cerasonar subwoofers are the natural complement of our speakers. The cerasonar 13362 sub are the ideal choice for bass demanding applications like home cinema. They have an integrated backbox to ensure consistent quality in every installation situation. To be screwed directly on the studs, through the pre-drilled holes in every side, replacing the standard drywall panels and can be plastered up to 2 mm.



CAD details

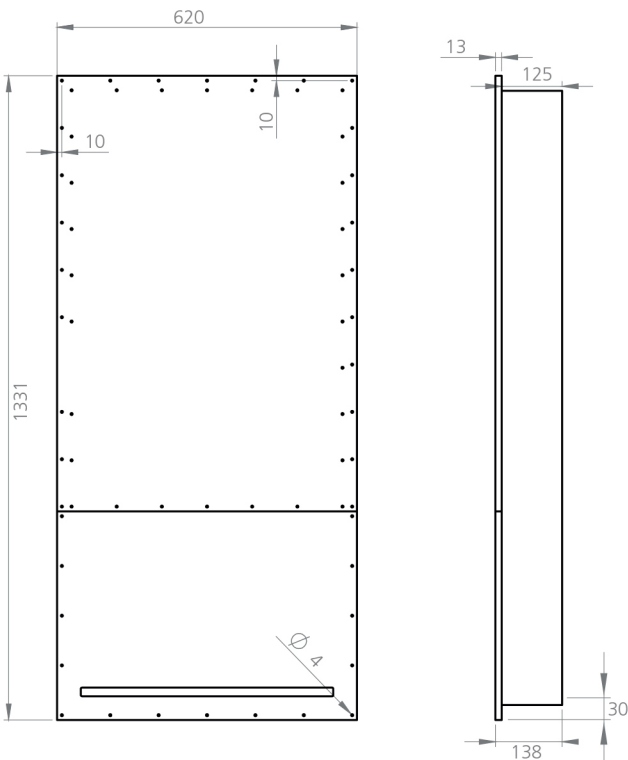

Technical specification

Power rating rms (max)	250 w
Impedance	4 ohms
Frequency range	25 – 150 hz
Dispersion range	hemispherical
max SPL	111 db
Dimensions	133 x 62 x 12,5 cm vent: 18 x 522 mm
Installation cut out	127,5 x 56,5 cm
Drywall	1- or 2-layer 12,5 mm plasterboard
Features	25 kg
Weight	2,1 kg

Installation Video:

Scan the QR code with your telephone to show the cerasonar installation video.



Warranty period

Cerasonar grants a 5-year functional warranty on speakers if the installation and setup protocol has been signed and registered with us. A cerasonar protection unit or the cs-500dsp4 amp with the respective preset is mandatory. Improper use or overloading may void the warranty.






cerasonar 10040 sub

The cerasonar subwoofers are the natural complement of our speakers. The cerasonar 10040 sub are the ideal choice for bass demanding applications like home cinema. They have an integrated backbox to ensure consistent quality in every installation situation. To be screwed directly on the studs, through the pre-drilled holes in every side, replacing the standard drywall panels and can be plastered up to 2 mm.



CAD details

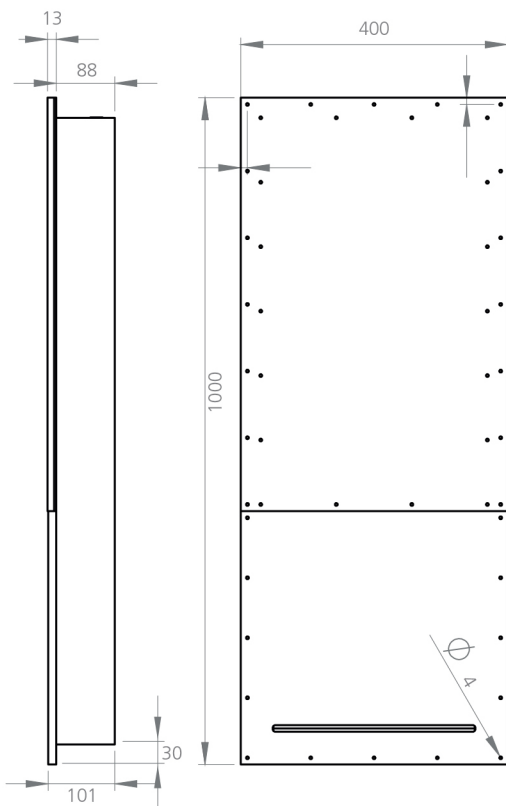

Technical specification

Power rating rms (max)	150 w
Impedance	4 ohms
Frequency range	35 – 150 hz
Dispersion range	hemispherical
max SPL	108 db
Dimensions	100 x 40 x 10,1 cm / vent: 10 x 304 mm
Installation cut out	95,5 x 34,5 cm
Drywall	1- or 2-layer 12,5 mm plasterboard
Features	10 kg
Weight	2,1 kg

Installation Video:

Scan the QR code with your telephone to show the cerasonar installation video.



Warranty period

Cerasonar grants a 5-year functional warranty on speakers if the installation and setup protocol has been signed and registered with us. A cerasonar protection unit or the cs-500dsp4 amp with the respective preset is mandatory. Improper use or overloading may void the warranty.

