





## cerasonar 9062 ulti

The cerasonar ultimate is a fullrange panel, it includes a 12" bass driver. It can be connected to any standard amplifier without the need of a protection unit or additional sub. The cerasonar ultimate series panels are designed to be screwed directly on the studs, through the pre-drilled holes in every side, replacing the standard drywall panels and can be plastered up to 2 mm.



### CAD details

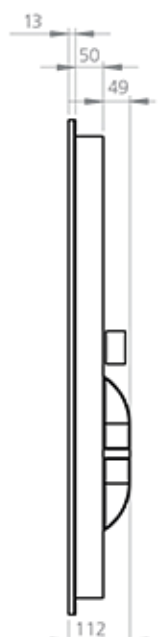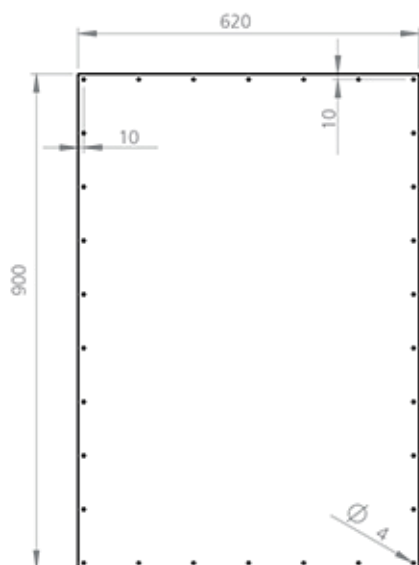

### Technical specification

Power rating rms (max)	100 w RMS / 200 w max
Impedance	4 ohms
Frequency range	1 bass driver, 2 exciters
Dispersion range	35 - 18.000 hz*
max SPL	180° x 180°
test	depending on installation situation, we recommend min. 100 litres installation volume
Dimensions	105 db
Installation cut out	84,5 x 56,5 cm
Drywall	1- or 2-layer 12,5 mm plasterboard
Features	protection inbuilt
Weight	9,5 kg



### Installation Video:

Scan the QR code with your telephone to show the cerasonar installation video.



### Warranty period

Cerasonar grants a 5-year functional warranty on speakers if the installation and setup protocol has been signed and registered with us. A cerasonar protection unit or the cs-500dsp4 amp with the respective preset is mandatory. Improper use or overloading may void the warranty.