




TM.ONTEC R E1 01 CB1

TM-OR.E1.CB001

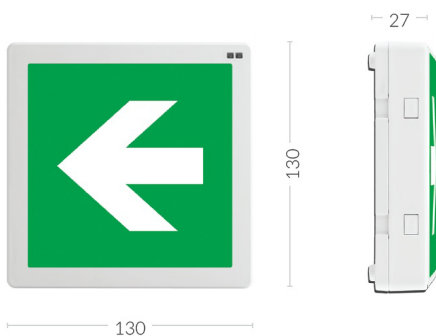

PARAMETERS


IP	IP20
IK	IK03
Version	for central battery
Power supply	210÷250 V AC
Power supply CB	186÷254 V DC
Temperature range	-15-55 °C
Material	PC
Colour	white
Duration time	depending on CB system
Operating mode	depending on CB system
Maximum light power (the luminaire can power the light source with a different power)	1.4 W
Active power	1.9 W
Insulation class	2
Luminance	>300 cd/m ²
Visibility	20 m





TM.ONTEC R E1 01 CB3

TM-OR.E1.C3001

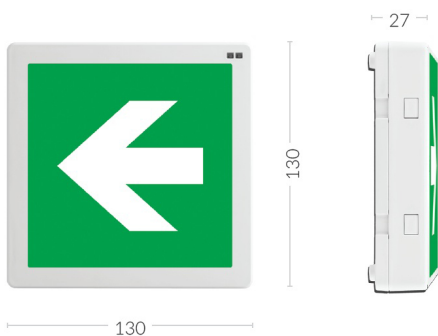

PARAMETERS

IP	IP20
IK	IK03
Version	for central battery
Power supply	210÷250 V AC
Power supply CB	186÷254 V DC
Temperature range	-10-40 °C
Material	PC
Colour	white
Duration time	depending on CB system
Operating mode	depending on CB system
Maximum light power (the luminaire can power the light source with a different power)	1.4 W
Active power	2.4 W
Insulation class	2
Luminance	>300 cd/m ²
Visibility	20 m

