


Bakelite® switch system with round coverings at a glance



Bakelite® switch system with square coverings at a glance

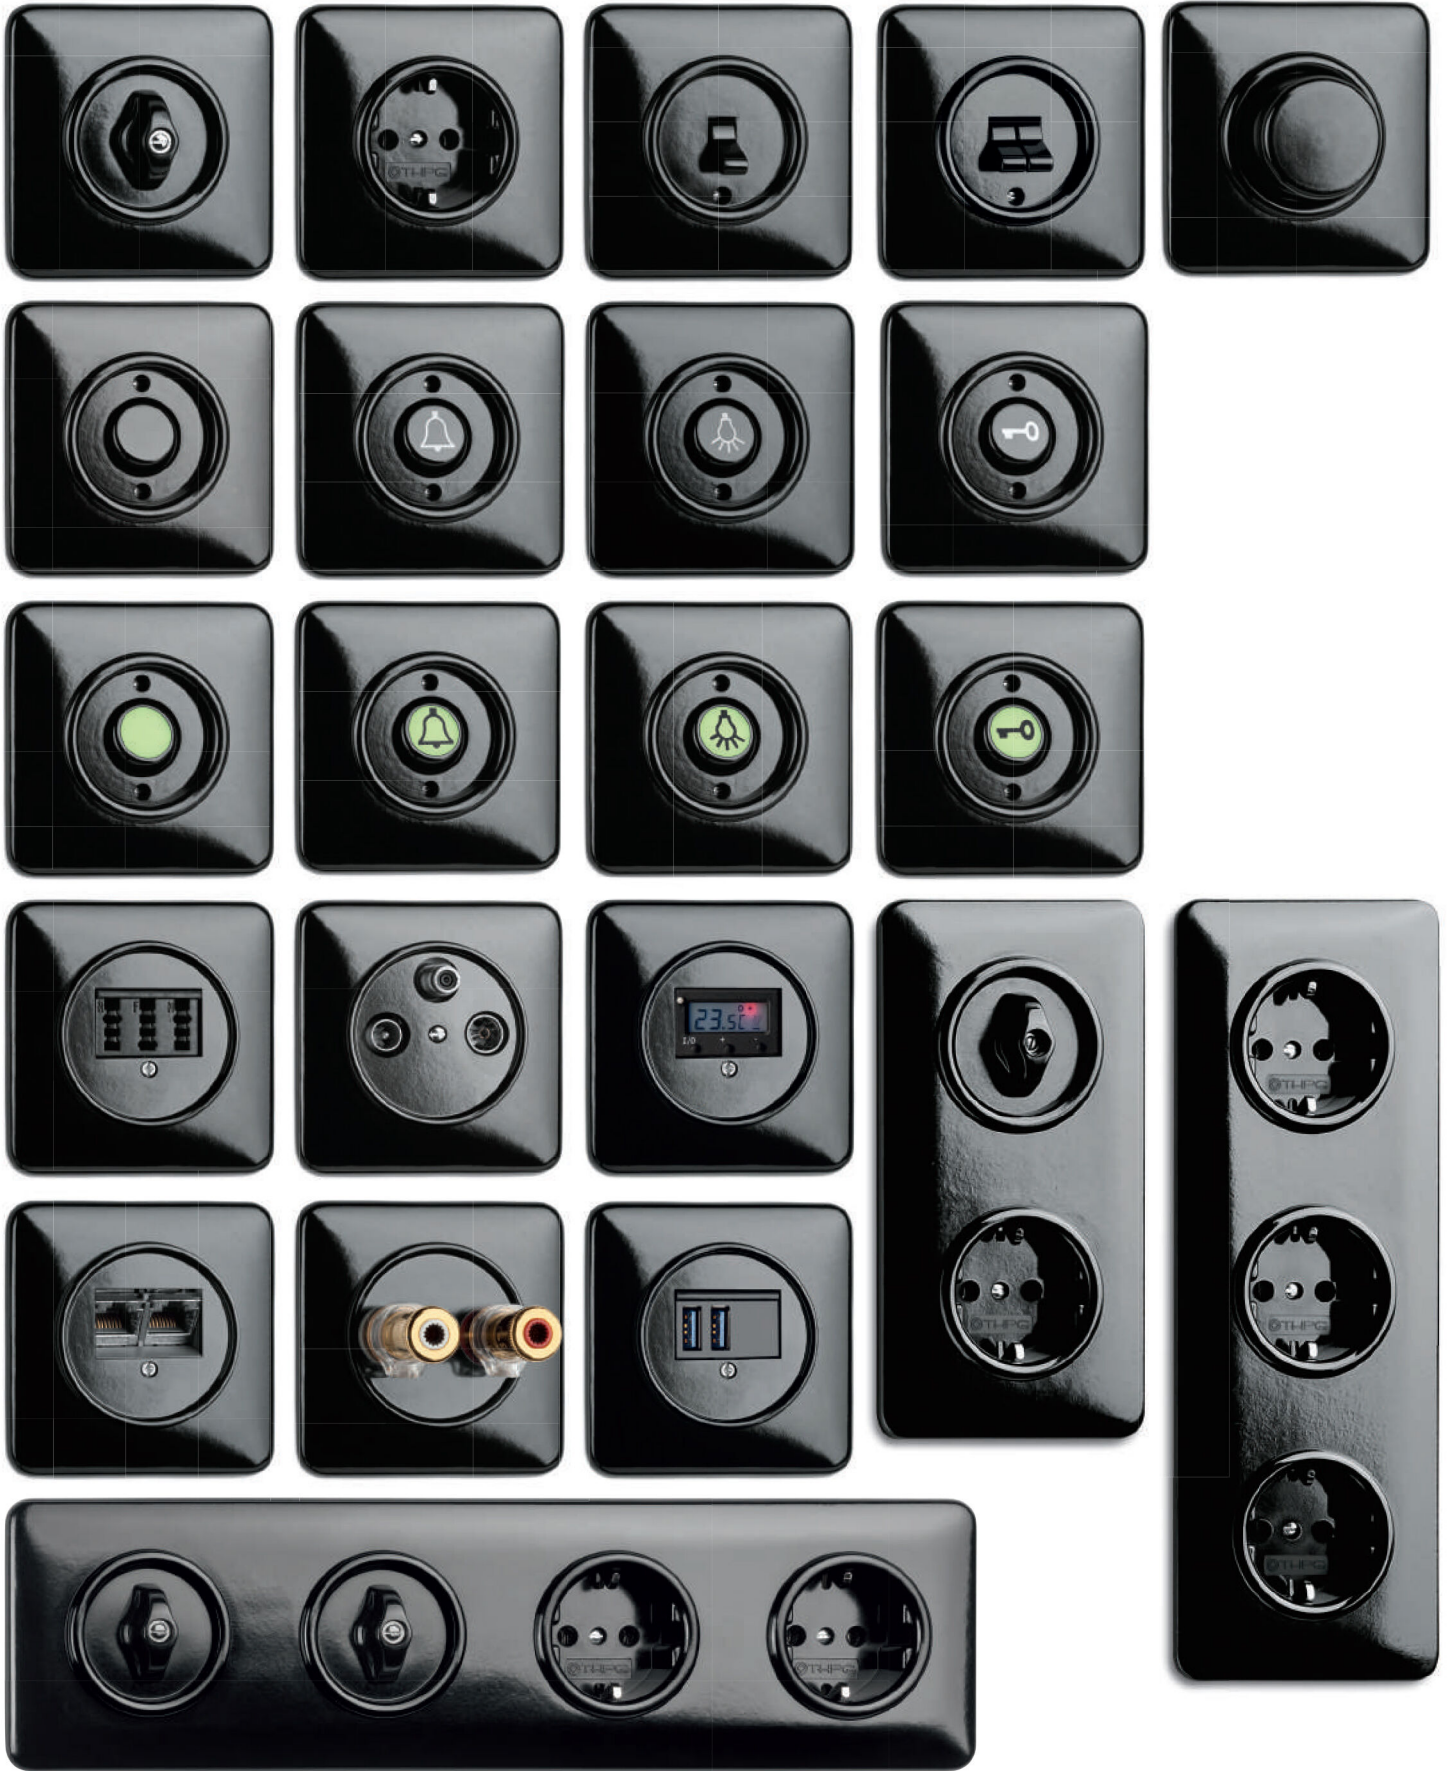

**OUTLET WITH SAFETY CONTACT BAKELITE®**

16 A, AC 250 V

Bakelite® central insert. With spring clips.

Order no. 173038

With shutter

Order no. 174527

OUTLET WITH MIDDLE-SAFETY CONTACT BAKELITE®

10 A, AC 250 V.

Bakelite® central insert. With spring clips. French version.

Order no. 175833

With shutter**OUTLET SWISS VERSION BAKELITE®**

10 A, AC 250 V. Bakelite® central insert. With spring clips.

For installation in DIN 49073-certified installation units.

Order no. 100940

ROTARY SWITCH BAKELITE®

10 A, 10 AX, AC 250 V. Bakelite® central insert and locking bolt. With spring clips.

Alternation switch

Order no. 186883

Crossbar switch


Order no. 186884

Multi-circuit switch

Order no. 186882

Blind switch

Order no. 186895

**TOGGLE SWITCH BAKELITE®**

10 A, 10 AX, AC 250 V

Bakelite® central insert and toggle.

Alternation switch

Order no. 173043

Crossbar switch

Order no. 173044

ROCKER BUTTON BAKELITE®

10 A, 10 AX, AC 250 V

Bakelite® central insert and compensator.

Alternation switch

Order no. 173112

Crossbar switch

Order no. 173113

Rocker switch control switch

Order no. 173047

ROCKER BUTTON WITHOUT SYMBOL BAKELITE®

10 A, AC 250 V. Bakelite® central insert

and compensator.

Order no. 173054

With illuminated compensator*

Order no. 100973

Rocker without symbol also available as an opener.

ROCKER BUTTON LIGHT BAKELITE®

10 A, AC 250 V

Bakelite® central insert and compensator

with lamp symbol.

Order no. 173055

With illuminated compensator*

Order no. 100974

Glow lamp for buttons and control switch.

The lower screw is replaced by the glow lamp.

Order no. 173066

**ROCKER BUTTON BELL BAKELITE®**

10 A, AC 250 V

Bakelite® central insert and compensator

with bell symbol

Order no. 173056

With illuminated compensator*

Order no. 100975

ROCKER BUTTON DOOR OPENER BAKELITE®

10 A, AC 250 V

Bakelite® central insert and compensator

with key symbol.

Order no. 173057

With illuminated compensator*

Order no. 100976

DIMMER BAKELITE®

AC 230 V, 50 Hz

Bakelite® central insert and dimming knob.

For LED lamps 7–110 W

Pressure alternation

Order no. 100274

For 60–600 W light bulbs

Pressure alternation

Order no. 173058

For LED lamps 3–80 W, 7–200 W/VA. AC 230 V

(+/-10%), 50 Hz, Pressure alternation

Order no. 100410

For LED lamps 3–160 W, 7–350 W/VA. AC 230 V

(+/-10%), 50 Hz, Pressure alternation


Order no. 100409

Electronic potentiometer.

AC 230 V (+/-10%), 50 Hz

Order no. 173105

* There are illuminated pigments integrated in the compensators which charge up by absorbing light energy and glow in the dark. They contain no radioactive materials.

**DATA JACK BAKELITE®**

Bakelite central insert.

For 2 network adapters RJ45 (real.Cat.6a).

Order no. 100722

Note: We recommend concealed sockets with increased socket volume for easy data socket installation.**TELEPHONE JACK BAKELITE®**

Bakelite central insert.

TAE 3x6 NFN

For 1 telephone and 2 additional devices or data terminals.

3 x 6 pole, 6 screwed contacts. Order no. 100721

ANTENNAE OUTLET BAKELITE®

Bakelite® central insert.

HF-resistant metal housing. BZT-authorisation.

Radio and television adapter for systems with amplifiers or cable. Passage and terminal box.

Order no. 100723

Radio and television adapter for systems with amplifiers according DIN 45330 with additional satellite outlet (F-adapter). Terminal box, digitally compatible.

Order no. 100724

TEMPERATURE CONTROL BAKELITE®

230V~/ 50 HZ. Useable as room- or floor thermostat.

Bakelite® central insert.

Order no. 100418

CLOCK THERMOSTAT USB BAKELITE®

230V~/ 50 HZ. Useable as room- or floor thermostat.

Bakelite® central insert. Settings possible via mini-USB-connection.

Order no. 100417

REMOTE SENSOR CABLE

For temperature control and clock thermostat.

NTC-Remote sensor cable. Length: 4m. Shortening / lengthening is possible.

Order no. 100425

SENSOR SLEEVE

Copper sleeve suitable for remote sensor cable, for installation in the ground floor. Ø 21 mm / 8 mm, Length: 113 mm.

Order no. 100426

USB CHARGE STATION BAKELITE®

100–240 V~/50- 60 HZ. In total 2,5 A max. charging current. 2 charging jacks USB Type A. Bakelite central insert.

Order no. 100876




SINGLE COVERING BAKELITE®

82 mm Ø. For assembly of all components with central insert excluding dimmer, data and telephone jack, antennae outlets, speaker wall sockets, temperature control, clock thermostat and USB charge station.

Order no. 173063

For assembly of dimmer, data and telephone jack, antennae outlets, speaker wall sockets, temperature control, clock thermostat and USB charge station.

Order no. 174940



SINGLE COVERING SQUARE BAKELITE®

82 x 82 mm. For assembly of all components with central insert excluding dimmer, data and telephone jack, antennae outlets, speaker wall sockets, temperature control, clock thermostat and USB charge station.

Order no. 119328

For assembly of dimmer, data and telephone jack, antennae outlets, speaker wall sockets, temperature control, clock thermostat and USB charge station.

Order no. 119327



EXTERNAL SYSTEM COVERING BAKELITE®

82 mm Ø. For vertical and horizontal assembly of all components with central insert excluding dimmer, data and telephone jack, antennae outlets, speaker wall sockets, temperature control, clock thermostat and USB charge station.

Order no. 173092

EXTERNAL SYSTEM COVERING FOR DIMMER BAKELITE®

82 mm Ø. For vertical and horizontal assembly of dimmer, data and telephone jack, antennae outlets, speaker wall sockets, temperature control, clock thermostat and USB charge station.

Order no. 173094

SYSTEM COVERING WAIST BAKELITE®


82 mm Ø. For vertical and horizontal assembly of all components with central insert excluding dimmer, data and telephone jack, antennae outlets, speaker wall sockets, temperature control, clock thermostat and USB charge station.

Order no. 173093

SYSTEM COVERING WAIST FOR DIMMER BAKELITE®

82 mm Ø. For vertical and horizontal assembly of dimmer, data and telephone jack, antennae outlets, speaker wall sockets, temperature control, clock thermostat and USB charge station.

Order no. 173095

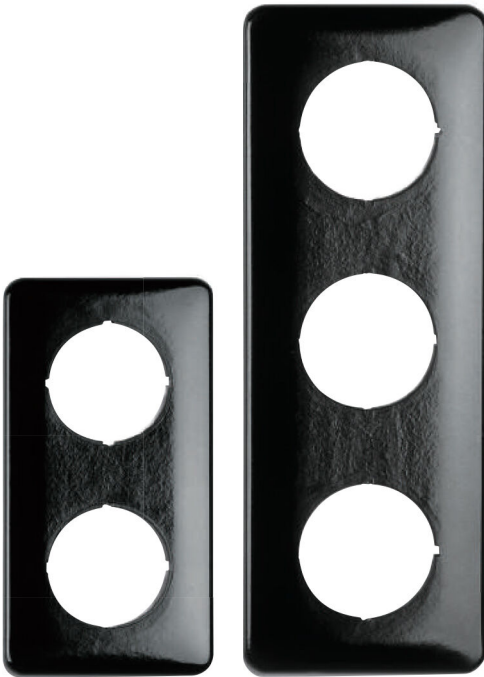

DOUBLE COVERING BAKELITE®

External size 157 x 82 mm. For vertical and horizontal assembly of all components with central insert including dimmer, data and telephone jack, antennae outlets, speaker wall sockets, temperature control, clock thermostat and USB charge station.

Order no. 173064



TRIPLE COVERING BAKELITE®

External size 228 x 82 mm. For vertical and horizontal assembly of all components with central insert including dimmer, data and telephone jack, antennae outlets, speaker wall sockets, temperature control, clock thermostat and USB charge station.


Order no. 173065

QUADRUPLE COVERING BAKELITE®


External size 299 x 82 mm. For vertical and horizontal assembly of all components with central insert including dimmer, data and telephone jack, antennae outlets, speaker wall sockets, temperature control, clock thermostat and USB charge station.

Order no. 173091


Dimensioning in mm




Rotary switch with round single covering Bakelite®




Rotary switch with square single covering Bakelite®




Double system faceplate Bakelite®

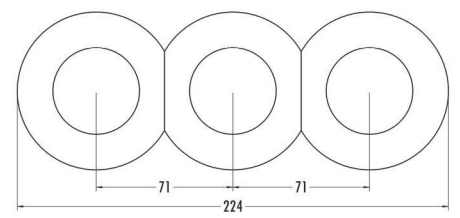


Triple system covering Bakelite®



Double covering Bakelite®

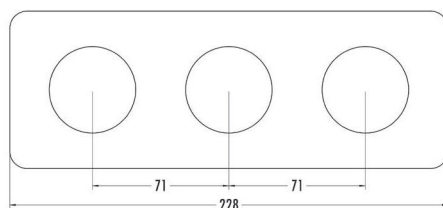

Triple covering Bakelite®

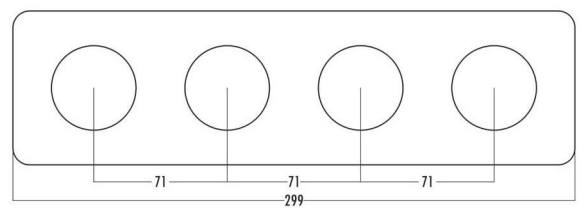

Quadruple covering Bakelite®

Installation note: The distances of the inserts in all multiple and system coverings are consistent with the standard spacing of 71 mm and can be easily used with existing installations. The Bakelite® switch systems fit in all standard concealed outlets.

For the vertical and horizontal installation of several devices into individual covers, we recommend a pitch of 91 mm for optical reasons.