




TM.ONTEC PPN 31P CB

TM-PN.31P.CB01W

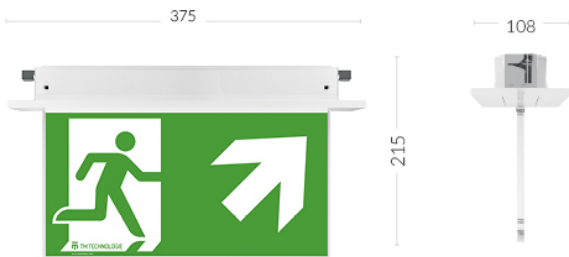

PARAMETERS


Insulation class	2
View fitting	double-sided fitting
Visibility	32 m
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
IP	IP20
IK	IK06
Version	for central battery
Power supply	210+250 V AC
Power supply CB	186+254 V DC
Temperature range	-15-55 °C
Material	PC
Colour	white
Duration time	depending on CB system
Operating mode	depending on CB system
Maximum light power (the luminaire can power the light source with a different power)	2.5 W
Active power	4.2 W
Luminance	>200 cd/m ²





TM.ONTEC PPN 31P CBA

TM-PN.31P.CBA1W

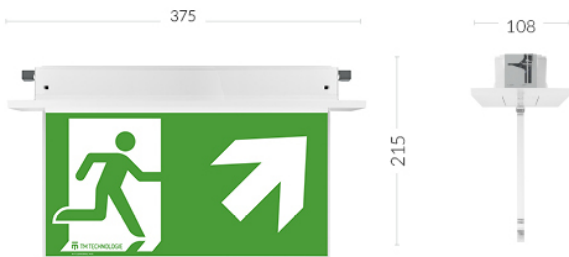

PARAMETERS

Insulation class	2
View fitting	double-sided fitting
Visibility	32 m
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
IP	IP20
IK	IK06
Version	for central battery
Power supply	210+250 V AC
Power supply CB	186+254 V DC
Temperature range	-10-40 °C
Material	PC
Colour	white
Duration time	depending on CB system
Operating mode	depending on CB system
Maximum light power (the luminaire can power the light source with a different power)	2.5 W
Active power	4.7 W
Luminance	>200 cd/m ²

