


75W KNX Dimmable Driver(Constant Current)

- Standard KNX signal input
- Dips to choose the operation current
- Preset value and modify preset value functions
- Switch/relative dimming via manual buttons
- Bus recovery (or reset) function
- Up to 6 color sequence, 64 scenes
- Status report, error report
- Power Factor ≥ 0.95
- High Efficiency $\geq 85\%$

Part No.	SRP-KNX9512-75W CCF	SRP-KNX9512-75W CCT
Input Voltage	200-240VAC	100-277VAC
Output current	4x(250-1500)mA	2x(250-1500)mA
Output Power	75W	75W
Output Voltage	8-48VDC	5-48VDC
Output Channel	4 channels	2 channels
Size	244x64x32mm	244x64x32mm

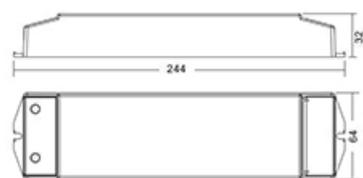

75W KNX Dimmable Driver(Constant Voltage)

- Standard KNX signal input, 4 channels PWM output
- Preset value and modify preset value functions
- Switch/relative dimming via manual buttons
- Bus recovery (or reset) function
- Color cycle
- Up to 6 color sequence, 64 scenes
- Status report, error report
- Power Factor ≥ 0.95
- High Efficiency $\geq 85\%$

Part No.	SRP-KNX9512-24-75W CVF
Input Voltage	100-277VAC
Output current	4x0.78A max.
Output Power	75W
Output Voltage	4x24VDC
Output Channel	4 channels
Size	244x64x32mm



- Standard KNX signal input, 4 channels PWM output
- Preset value and modify preset value functions
- Switch/relative dimming via manual buttons
- Bus recovery (or reset) function
- Color cycle
- Up to 6 color sequence, 64 scenes
- Status report, error report
- Power Factor ≥ 0.95
- High Efficiency $\geq 85\%$
- Constant voltage
- Built-in two-stage active PFC function
- Low standby power < 1W
- Ripple Free

100W KNX Dimmable Driver

Part No.	SRPC-KNX9512-24-100W CV	SRPC-KNX9512-12-100W CV
Input Voltage	100-277VAC	100-277VAC
Output current	4x1.04A max.	4x2.08A max.
Output Power	100W	100W
Output Voltage	4x24VDC	4x12VDC
Output Channel	4 channels	4 channels
Size	240x72x36mm	240x72x36mm



200W KNX Dimmable Driver

Part No.	SRPC-KNX9512-24-200W CV	SRPC-KNX9512-12-200W CV
Input Voltage	100-277VAC	100-277VAC
Output current	4x2.08A max.	4x4.16A max.
Output Power	200W	200W
Output Voltage	4x24VDC	4x12VDC
Output Channel	4 channels	4 channels
Size	240x72x36mm	240x72x36mm



300W KNX Dimmable Driver

Part No.	SRPC-KNX9512-24-300W CV	SRPC-KNX9512-12-300W CV
Input Voltage	100-277VAC	100-277VAC
Output current	4x3.12A max.	4x6.24A max.
Output Power	300W	300W
Output Voltage	4x24VDC	4x12VDC
Output Channel	4 channels	4 channels
Size	276.5x83.5x40mm	276.5x83.5x40mm



400W KNX Dimmable Driver

Part No.	SRPC-KNX9512-24-400W CV	SRPC-KNX9512-12-400W CV
Input Voltage	100-277VAC	100-277VAC
Output current	4x4.16A max.	4x8.32 max.
Output Power	400W	400W
Output Voltage	4x24VDC	4x12VDC
Output Channel	4 channels	4 channels
Size	276.5x83.5x40mm	276.5x83.5x40mm

