

Porcelain switch system at a glance



**OUTLET WITH SAFETY CONTACT PORCELAIN**

16 A, AC 250V

Duroplast central insert. With spring clips.

Order no. 173067

With shutter

Order no. 173068

OUTLET WITH MIDDLE-SAFETY CONTACT PORCELAIN

16 A, AC 250V.

Duroplast central insert. With spring clips. French version.

Order no. 175835

With shutter**OUTLET SWISS VERSION PORCELAIN**

16 A, AC 250V

Duroplast central insert. With spring clips.

For installation in DIN 49073-certified installation units.

Order no. 100873

ROTARY SWITCH PORCELAIN

10 A, 10 AX, AC 250V

Porcelain central insert and locking bolt. With spring clips.

Alternation switch

Order no. 186880

Crossbar switch

Order no. 186881

Multi-circuit switch

Order no. 186879

Blind switch

Order no. 186894

TOGGLE SWITCH PORCELAIN

10 A, 10 AX, AC 250V

Porcelain central insert. Duroplast compensator.

Alternation switch

Order no. 173073

Crossbar switch

Order no. 173074

Control switch

Order no. 173075

**ROCKER BUTTON WITHOUT SYMBOL PORCELAIN**

10 A, AC 250V

Porcelain central insert. Duroplast compensator.

Order no. 173076

With illuminated compensator*

Order no. 100977

Rocker button without symbol also available as an opener.

ROCKER BUTTON LIGHT PORCELAIN

10 A, AC 250V

Porcelain central insert. Duroplast compensator with light symbol.

Order no. 173077

With illuminated compensator*

Order no. 100978

Glow lamp for buttons and control switch

The lower screw is replaced by the glow lamp.

Order no. 173066

**ROCKER BUTTON BELL PORCELAIN**

10 A, AC 250V

Porcelain central insert. Duroplast compensator with bell symbol.

Order no. 173078

With illuminated compensator*

Order no. 100979

ROCKER BUTTON DOOR OPENER PORCELAIN

10 A, AC 250V

Porcelain central insert. Duroplast compensator with key symbol.

Order no. 173079

With illuminated compensator*

Order no. 100980

* There are illuminated pigments integrated in the compensators which charge up by absorbing light energy and glow in the dark. They contain no radioactive materials.

DIMMER PORCELAIN

AC 230V, 50Hz. Porcelain central insert and dimming knob.

For LED lamps 7–110 W

Pressure alternation

Order no. 100270

For 60–600 W light bulbs

Pressure alternation

Order no. 173080

For LED lamps 3–80 W, 7–200 W/VA. AC 230 V

(+/-10%), 50 Hz, Pressure alternation

Order no. 100408

For LED lamps 3–160 W, 7–350 W/VA. AC 230 V

(+/-10%), 50 Hz, Pressure alternation

Order no. 100407

Electronic potentiometer

AC 230 V (+/-10%), 50 Hz

Order no. 173100

**DATA JACK PORCELAIN**

Duroplast central insert.

For 2 network adapters RJ45 (real.Cat.6a).

Order no. 181978

Note: We recommend concealed sockets with increased socket volume for easy data socket installation.**TELEPHONE JACK PORCELAIN**

Duroplast central insert.

TAE 3x6 NFN

For 1 telephone and 2 additional devices or data terminals.

3 x 6 pole, 6 screwed contacts.

Order no. 150117

ANTENNAE OUTLET PORCELAIN

Duroplast central insert.

HF-resistant metal housing. BZT-authorisation.

Radio and television adapter for systems with amplifiers or cable. Passage and terminal box. Order no. 150121

Radio and television adapter for systems with amplifiers according DIN 45330 with additional satellite outlet (F-adapter). Terminal box, digitally compatible.

Order no. 154911

TEMPERATURE CONTROL PORCELAIN

230V~/ 50 HZ. Useable as room- or floor thermostat.

Duroplast central insert.

Order no. 100416

CLOCK THERMOSTAT USB PORCELAIN

230V~/ 50 HZ. Useable as room- or floor thermostat.

Duroplast central insert. Settings possible via mini-USB-connection.

Order no. 100415

REMOTE SENSOR CABLE

For temperature control and clock thermostat.

NTC-Remote sensor cable. Length: 4m. Shortening / lengthening is possible.

Order no. 100425

SENSOR SLEEVE

Copper sleeve suitable for remote sensor cable, for installation in the ground floor. Ø 21 mm / 8 mm, Length: 113 mm.

Order no. 100426

USB CHARGE STATION PORCELAIN

100–240 V~/50- 60 HZ. In total 2,5 A max. charging current. 2 charging jacks USB Type A. Duroplast central insert.

Order no. 181979



SINGLE COVERING PORCELAIN

82 mm Ø. For assembly of all components with central insert excluding data and telephone jack, antennae outlets, speaker wall sockets, temperature control, clock thermostat and USB charge station.

Order no. 173085

For assembly of data and telephone jack, antennae outlets, speaker wall sockets, temperature control, clock thermostat and USB charge station.

Order no. 173086



DOUBLE COVERING PORCELAIN

External dimension 153 x 82 mm. For vertical and horizontal assembly of all components with central insert excluding data and telephone jack, antennae outlets, speaker wall sockets, temperature control, clock thermostat and USB charge station.

Order no. 173090



EXTERNAL SYSTEM COVERING PORCELAIN

82 mm Ø. For vertical and horizontal assembly of all components with central insert excluding data and telephone jack, antennae outlets, speaker wall sockets, temperature control, clock thermostat and USB charge station.

Order no. 173088

For vertical and horizontal assembly of data and telephone jack, antennae outlets, speaker wall sockets, temperature control, clock thermostat and USB charge station.


Order no. 173089

SYSTEM COVERING WAIST PORCELAIN


82 mm Ø. For vertical and horizontal assembly of all components with central insert excluding data and telephone jack, antennae outlets, speaker wall sockets, temperature control, clock thermostat and USB charge station.

Order no. 173087


Dimensioning in mm

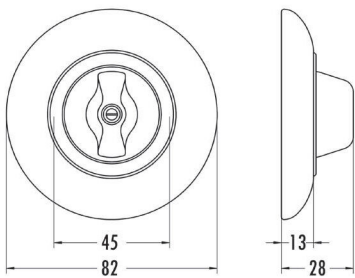

Rotary switch with single cover porcelain

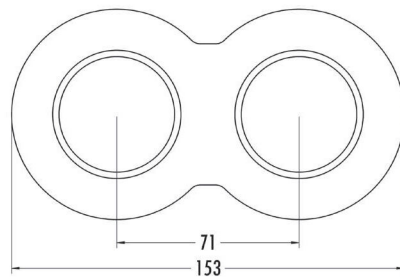


Double covering porcelain

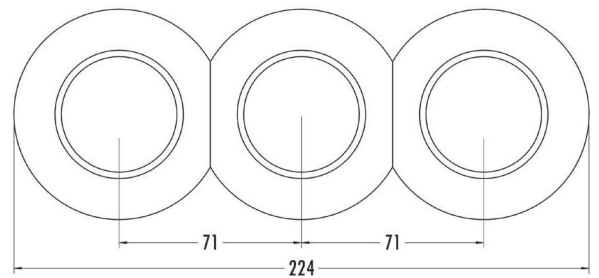

Triple system covering porcelain

Installation note: The distances of the inserts in all multiple and system coverings are consistent with the standard spacing of 71 mm and can be easily used with existing installations. The porcelain switch system fits in all standard concealed outlets.

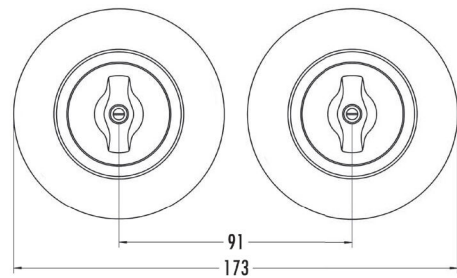

For the vertical and horizontal installation of several devices into individual covers, we recommend a pitch of 91 mm for optical reasons.

